

MODEL D15s



TECHNICAL SPECIFICATIONS



Small footprint, big sound. Benefiting from many of the technologies of our flagship subs, these sealed subs generate amazing performance in the smallest footprint. Low Q, shallow rolloff response geared for sound quality and smoothly integrating into the listening room. Also, a great choice for using multiple subs to optimize in room response and smooth out seat-to-seat variation. The D15s is the smallest single sub certified THX Dominus available on earth. Power by our 2.0kW amplifier, all functions and safeties are controlled by a 48-bit data bath DSP and 32-bit ARM M4 Cortex processor, able to react in microseconds, powerful enough to slam. Ground up drivers developed by our team of engineers. Carbon fiber composite diaphragms, multiple aluminum shorting rings, massive magnets, multi-layer Nomex spiders and lightweight aluminum voice coil wire are the key ingredients - Proprietary non-linear modeling techniques allow us to simulate all these components and then optimize for real world driver performance - free air and in box. Further refinement is done with the aid of Klippel laser measurements to dial things in. All D-Series subs share our 2.4" LCD touchscreen display and ability to control advance settings using our App.

BASIC

Dimensions (HxWxD)
528 x 500 x 500mm
20.8 x 19.7 x 19.7"

Weight
46.0 kg (101.2 lbs.)

Available finishes
Piano black

TECHNICAL

Alignment
Acoustic suspension

Amplifier
2.0kW rms short term

Display Interface
2.4" LCD color touchscreen

App
iOS and Android

Processor
32-bit ARM Cortex M4, double precision floating point math

DSP Engine
Ti DSP 48-bit data paths

Driver complement
380mm, Carbon fiber diaphragm +/-30mm linear excursion

Frequency Response

- THX EQ
20-320Hz (-6dB) / 16-395Hz (-10dB)
- Boost (Large Room) EQ
16-320Hz (-6dB) / 14-395Hz (-10dB)

- Cut (Small Room) EQ
24-320Hz (-6dB) / 18-395Hz (-10dB)

Inputs
(2) Balanced XLR
(2) Unbalanced RCA

Outputs
(2) Balanced XLR unbuffered
(2) Unbalanced RCA unbuffered

Parametric EQ
10-Band PEQ with 3 user presets


Low Pass filter
Bypass, 30-160Hz, slope 6,12,18,24dB/oct

Phase
variable 0-270°


Polarity
Normal / inverted

Configurable Auto turn-on and 12v Trigger
XLR 1, XLR 1+2, RCA 1, RCA 1+2

Certification
THX Dominus




App Control
iOS and Android



Advanced APP User interface
Customizable turn-on controls and input selection, multiple PEQ's with presets.







Processor
32-bit ARM Cortex M4



DSP Engine
48-bit data paths

REVISIONS		DATE
REV.	DESCRIPTION	
1	Initial Release	4/11/2021

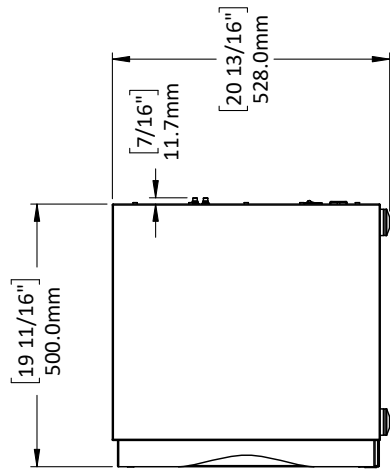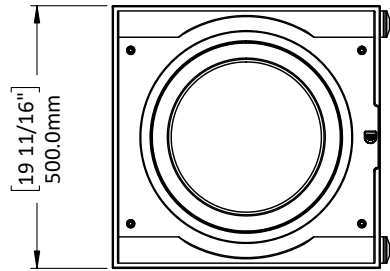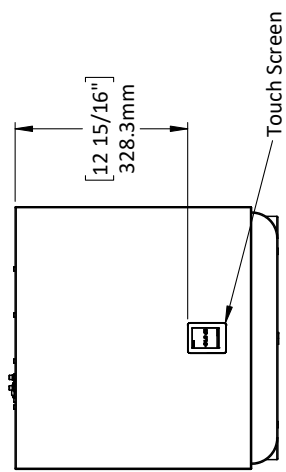

D C B A

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PERLISTEN AUDIO, LLC. ANY REPRODUCTION OR TRANSMISSION OF THIS DRAWING WITHOUT THE WRITTEN PERMISSION OF PERLISTEN AUDIO, LLC IS PROHIBITED.
 DRAWING AREA IN MILLIMETERS
 DO NOT SCALE DRAWING

NAME	DATE	
TITLE:		Sheet1
SIZE	DWG. NO.	REV
A	PL_D15s1200_Architectural	1
SCALE: 1:12		SHEET 1 OF 1